




## SMART CONTROLLER+

Versatile indoor controller with I/O capabilities to control door lock, alarm system and other third-party devices.


- Features up to 4 relays and 8 I/O lines
- Connects directly to TBS devices via RS485
- Network ready
- Easy installation
- DIN rail clamp included

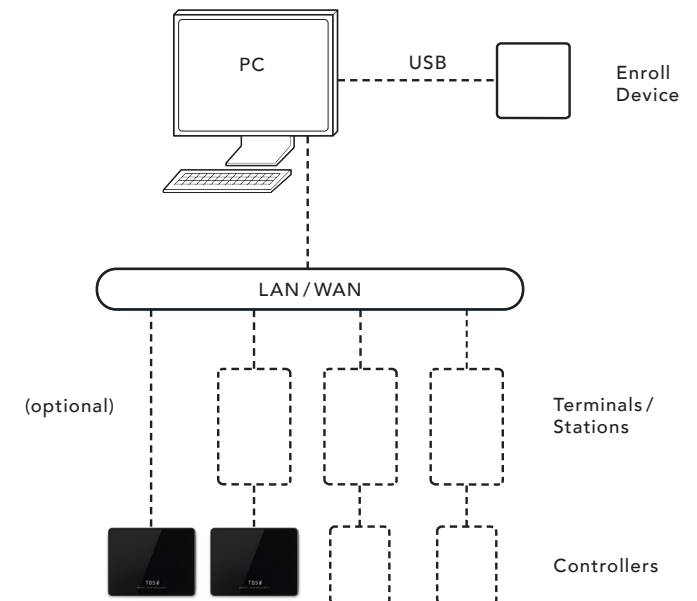



## SMART CONTROLLER+

Wall mount

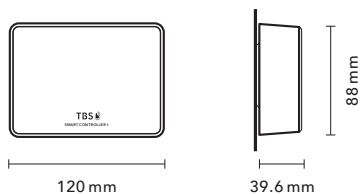

CPU	ARM Cortex-A53 1.2 GHz Quad Core
RAM	1 GB
Flash	4 GB (MicroSD)
Connectivity	1 × LAN 10/100 Mbps (RJ45)
	4 × USB 2.0
	WLAN
	Bluetooth
Ports	4 × Relay output
	4 × General Purpose Input (GPIN)
	4 × General Purpose Output (GPOUT)
Operating System	Embedded Linux
Software	SC+ Configurator (web based)
Certifications	CE
Operating Temperature	-20–60°C
Power	9–36 VDC
Dimension	120 × 80 × 39.6

Touchless Biometric Systems AG  
Rietbrunnen 2  
8808 Pfäffikon SZ  
Switzerland  
tbs@tbs-biometrics.com  
www.tbs-biometrics.com